

07/22/98  
15503 U.S. PTO

Patent Application  
Docket No. 27943-00200USPT

IN THE UNITED STATES PATENT AND TRADEMARK OFFICE

In re Application of:

Vladimir Alpereovich and Eric Valentine

Entitled: A METHOD, SYSTEM AND APPARATUS IN A TELECOMMUNICATIONS  
NETWORK FOR SELECTIVELY TRANSMITTING INFORMATION  
UTILIZING THE INTERNET

To the Assistant Commissioner  
for Patents  
Box Patent Application  
Washington, D.C. 20231

CERTIFICATE OF MAILING BY EXPRESS MAIL

"EXPRESS MAIL" Mailing Label No. EM387824240US  
Date of Deposit July 22, 1998  
I hereby certify that this paper or fee is being  
deposited with the U.S. Postal Service "Express  
Mail Post Office to Addressee" service under  
37 CFR 1.10 on the date indicated above and is  
addressed to the Assistant Commissioner for  
Patents, Washington, D.C. 20231

Type or Print Name Carol Mitchell . . . . .  
*Carol Mitchell* . . . . .  
Signature

Dear Sir:

REQUEST FOR FILING A NATIONAL PATENT APPLICATION

Transmitted herewith for filing, please find the following:

- ☒ 1. Specification, claims and abstract of the above-referenced patent application having  
\_43\_ pages.
- ☒ 2. Six (6) sheet(s) of drawing(s) (☒ formal / ☐ informal) comprising Figures  
1-6.
- ☒ 3. Combined Declaration and Power of Attorneys (☒ signed ☐ unsigned).
- ☐ 3A. No filing fee, Oath, or Declaration is enclosed pursuant to 37 C.F.R 1.53(d).
- ☐ 4. Information Disclosure Statement along with Form PTO-1449 and references.

- \_\_\_ 5. This is a: \_\_\_ Continuation-In-Part; \_\_\_ Divisional; \_\_\_ Continuation;  
\_\_\_ substitute Application (MPEP 201.09) of Application Serial No. \_\_\_ filed  
\_\_\_; \_\_\_ reissue of U.S. Patent No. \_\_\_ filed on \_\_\_.

An extension to extend the life of the above prior Application to at least the date  
of filing hereof

(One box must be marked)

- (a) \_\_\_ is concurrently being filed in that prior Application,  
(b) \_\_\_ was previously filed in that prior Application,  
(c) \_\_\_ is not necessary for copendency.

- \_\_X\_\_ 6. Attached is an assignment to Ericsson Inc. Please return the recorded assignment  
to the undersigned.

- \_\_\_ 7. Priority is claimed under 35 U.S.C. § 119 based on filing in \_\_\_(country)\_\_\_.

	<u>Application No.</u>	<u>Filing Date</u>
--	------------------------	--------------------

- |     |     |     |
|-----|-----|-----|
| (1) | ___ | ___ |
| (2) | ___ | ___ |
| (3) | ___ | ___ |

\_\_\_ (No.) Certified copy (copies) \_\_\_ are attached; or \_\_\_ were previously filed on  
\_\_\_.

- \_\_\_ 8. Attached: \_\_\_ (No.) verified statement(s) establishing "small entity" status under  
37 CFR § 1.9 and 1.27.

- \_\_X\_\_ 9. Attached:

\_\_X\_\_ Return Postcard  
\_\_\_ (Other)

- \_\_\_ 10. Preliminary Amendment:

Prior to a first Office Action, kindly amend the Application as follows:

11. The following Filing Fee calculation is based on the claims filed less any claims canceled by the Preliminary Amendment of Item 10.


					SMALL ENTITY RATE		LARGE ENTITY RATE		
BASIC FEE					\$395	OR	\$790	=	\$ 790.00
	NUMBER FILED			NUMBER EXTRA					
TOTAL CLAIMS	<u>27</u>	-20	=	<u>7</u> (at least 0)	x 11	OR	x 22	=	+\$ 154.00
INDEP. CLAIMS	<u>3</u>	- 3	=	<u>0</u> (at least 0)	x 41	OR	x 82	=	+\$
If any <u>proper</u> multiple dependent claim (ignore improper) is present (Enter \$0.00 if this is a <u>reissue</u> application.)					+\$135	OR	+\$270	=	+\$
If assignment is x'd (item 6), add recording fee \$40.00									\$
Attached is a Rule 47 Petition (inventor refuses to sign or cannot be reached) \$130									+\$
TOTAL FILING FEE									= \$ 944.00

- X 12. Checks in the amount of \$944.00 to cover the Filing Fee calculated in Item 11 and \$40.00 to cover the Assignment Recordation Fee are attached. Please charge any deficiency or credit any overpayment to Deposit Account No. 10-0447.
13. Please charge my Deposit Account No. 10-0447 in the amount of \$\_\_\_\_\_ to cover the Filing Fee calculated in Item 11. This sheet is attached in duplicate.
- X 14. The Commissioner is hereby authorized to charge any fee specifically authorized hereafter, or any missing or insufficient fee(s) filed, or asserted to be filed, or which should have been filed herewith or concerning any paper filed hereafter, and may be required under 37 CFR 1.16-1.18 (missing or insufficiencies only) now or hereafter relative to this application and for the resulting Official Document under 37 CFR 1.20, and to have and cause any necessary petition for extension of time to be filed and any fees necessary to be paid for said extension of time OR credit any overpayment to our Deposit Account No. 10-0447, for which purpose a

duplicate copy of this sheet is attached. **The Commissioner is not authorized to charge the issue fee until/unless an issue fee transmittal form is filed.**

Respectfully submitted,

JENKENS & GILCHRIST, P.C.

By:   
Name: Raymond Van Dyke  
Reg. No. 34,746

Jenkins & Gilchrist, P.C.  
1445 Ross Avenue  
Suite 3200  
Dallas, Texas 75202  
(214) 855-4708  
(214) 855-4300 (fax)

Patent Application  
Docket #27943-00200  
EUS01406-RMOG

CERTIFICATE OF MAILING BY EXPRESS MAIL	
"EXPRESS MAIL" Mailing Label No.: EM387824240US .	
Date of Deposit: July 22, 1998 . . . . .	
I hereby certify that this paper or fee is being deposited with the U.S. Postal Service "Express Mail Post Office to Addressee" service under 37 C.F.R. 1.10 on the date indicated above and is addressed to the Assistant Commissioner for Patents, Box Patent Application, Washington, D.C. 20231	
Type or Print Name	Carol Mitchell . . . . .
<i>Carol Mitchell</i>	
Signature	

**A METHOD, SYSTEM AND APPARATUS IN A TELECOMMUNICATIONS  
NETWORK FOR SELECTIVELY TRANSMITTING INFORMATION  
UTILIZING THE INTERNET**

**BACKGROUND OF THE INVENTION**

**Technical Field of the Invention**

The present invention relates in general to the field  
of wireless telecommunications, and in particular, to a  
5 method and system for enabling a subscriber to selectively  
forward information over or through the Internet.

**Description of Related Art**

Mobile wireless communication is becoming increasingly  
important for providing safety, convenience, improved

productivity, and simple conversational pleasure. One prominent mobile wireless communication option is cellular communication. Cellular phones, for instance, can be found in cars, briefcases, purses, and even pockets. For cellular  
5 phone system providers to offer cellular phone users new services, cellular wireless networks must be upgraded.

Referring now to FIGURE 1 of the drawings, an exemplary cellular wireless network, such as a Global System for Mobile Communication (GSM) Public Land Mobile Network (PLMN) 100,  
10 will be described. The PLMN 100 is composed of a plurality of areas 105, each with a Mobile Services Switching Center (MSC) 110 and an integrated Visitor Location Register (VLR) 115 therein. The MSC/VLR areas 105, in turn, include a plurality of Location Areas (LA) 120, which are defined as  
15 that part of a given MSC/VLR area 105 in which a Mobile Station (MS) (terminal) 125 may move freely without having to send update location information to the MSC/VLR area 105 that controls the LA 120. Each LA 120 is divided into a number of cells 130. The MS 125 is the physical equipment,  
20 e.g., a car phone or other portable phone, used by mobile subscribers to communicate with the cellular network 100,

each other, and users outside the subscribed network, both wireline and wireless.

The MSC 110 is in communication with at least one Base Station Controller (BSC) 135, which, in turn, is in contact  
5 with at least one Base Transceiver Station (BTS) 140. The BTS 140 is the physical equipment, illustrated for simplicity as a radio tower, that provides radio coverage to the geographical part of the cell 130 for which it is responsible. It should be understood that the BSC 135 may  
10 be connected to several base transceiver stations 140, and may be implemented as a stand-alone node or integrated with the MSC 110. In either event, the BSC 135 and the BTS 140 components, as a whole, are generally referred to as a Base Station System (BSS) 145.

15 With further reference to FIGURE 1, the PLMN Service Area or wireless network 100 includes a Home Location Register (HLR) 150, which is a database maintaining all subscriber information, e.g., user profiles, current location information, International Mobile Subscriber Identity (IMSI)  
20 numbers, and other administrative information. The HLR 150 may be co-located with a given MSC 110, integrated with the

MSC 110, or alternatively can service multiple MSCs 110, the latter of which is illustrated in FIGURE 1.

The VLR 115 is a database containing information about all of the Mobile Stations 125 currently located within the MSC/VLR area 105. If a MS 125 roams into a new MSC/VLR area 105, the VLR 115 connected to that MSC 110 will request data about that MS 125 from the HLR database 150 (simultaneously informing the HLR 150 about the current location of the MS 125). Accordingly, if the user of the MS 125 then wants to make a call, the local VLR 115 will have the requisite identification information without having to reinterrogate the HLR 150. In the aforescribed manner, the VLR and HLR databases 115 and 150, respectively, contain various subscriber information associated with a given MS 125.

Increasingly, mobile service subscribers are using their MS 125 as much as, or even more than, a traditional wireline phone. As a result, mobile service subscribers value options that lower the cost of their wireless service subscription or the per-minute charges thereof. Consequently, it is desirable to be able to lower the cost of service.



Additionally, wireless service subscribers are demanding value-added features from their wireless communication systems providers. Examples of such services are caller identification (ID), voice mail, and standard call forwarding. Existing wireless communication systems do not, however, offer their subscribers the ability to forward information over the Internet to an Internet address. Such existing wireless communication systems likewise do not offer their subscribers the ability to forward information through the Internet.

Because information transmission costs over the packet-switched Internet are substantially cheaper than transmission over the traditional circuit-switched telephone network, wireless service costs can be reduced by permitting a subscriber to optionally forward information over/through the Internet. Additionally, an option to forward information over the Internet would permit a subscriber to have data or other information transmitted directly to an Internet protocol (IP) address. In short, existing wireless communication systems have heretofore failed to provide the ability for a subscriber to choose to have information

forwarded through the Internet (before returning to the wireless communication network) or over the Internet to an IP address.

#### SUMMARY OF THE INVENTION

5           The present invention addresses the above (and other) deficiencies in the prior art by achieving the following (and other) objects of the invention:

          An object of the invention is to provide a method and system that permits information contained in incoming calls  
10       to be selectively forwarded over/through the Internet.

          Another object of the invention is to provide a method and system that enables a subscriber to request that only certain types of incoming calls be forwarded over/through the Internet.

15           A further object of the invention is to implement a method and system that enables a subscriber to request that only long distance calls be forwarded over/through the Internet.

          Yet another object of the invention is to implement a  
20       method and system that can forward information from incoming

calls directly to a designated Internet protocol (IP) address destination.

A still further object of the invention is to implement a method and system whereby telecommunication signaling is effectuated over the Internet.

These objects are achieved with a method and system for a wireless communications system in which incoming calls for a wireless services subscriber are selectively forwarded over/through the Internet based, at least in part, on a profile established by the subscriber. Such a wireless telecommunications system preferably includes Mobile Stations and corresponding subscribers, Visiting Mobile Services Switching Centers (VMSCs), Home Location Registers (HLRs), and Gateway Mobile Services Switching Centers (GMSCs). The present invention is also operable in conjunction with the Internet or other packet switched network for the selective transmission of information contained in incoming calls.

In a first embodiment, a subscriber may activate an Internet call forwarding (ICF) supplementary service (SS). The subscriber activates the ICF SS from, for example, the corresponding MS. An ICF message is transmitted from the

corresponding MS to a base station system and an associated Mobile Services Switching Center (MSC). The MSC sends the ICF message to the HLR of the subscriber and corresponding MS. The HLR thereafter establishes an ICF profile that  
5 includes an indication that the ICF SS is activated and that may further include at least one indication of whether any special feature(s) are currently in effect.

Special features can include instructions to forward over/through the Internet only certain types of incoming  
10 calls, such as fax and data calls. They can include instructions to only forward over/through the Internet calls that would otherwise result in the assessment of long distance charges. They can also include instructions to forward all or some types of calls directly over the Internet  
15 to an Internet protocol (IP) address destination. When this feature is being activated, the ICF message may optionally include a designated IP address destination. It should be understood that other features may also be included.

When a GMSC receives notification of an incoming call,  
20 the GMSC interrogates the HLR corresponding to the called party to determine whether an ICF SS is activated. If so,

then a comparison between the incoming call and the ICF  
profile is executed to determine whether Internet  
transmission is appropriate. The results of the  
determination are then effectuated. This ICF SS therefore  
5 provides an additional value-added service and reduces the  
costs of telecommunications by transmitting information  
over/through a packet-switched network instead of a circuit-  
switched network.

In a second embodiment, both conventional and novel  
10 telecommunications signaling are executed over the Internet.  
For example, the transmission of the ICF message from the  
VMSC to the HLR may be accomplished over the Internet in lieu  
of a Signaling System No. 7 (SS7) network.

The above-described and other features of the present  
15 invention are explained in detail hereinafter with reference  
to the illustrative examples shown in the accompanying  
drawings. Those skilled in the art will appreciate that the  
described embodiments are provided for purposes of  
illustration and understanding and that numerous equivalent  
20 embodiments are contemplated herein.

## BRIEF DESCRIPTION OF THE DRAWINGS

A more complete understanding of the method and system of the present invention may be had by reference to the following detailed description when taken in conjunction with the accompanying drawings wherein:

FIGURE 1 illustrates an exemplary cellular wireless network in which the present invention may be practiced;

FIGURE 2 illustrates an exemplary wireless communications network incorporating Internet call forwarding according to the present invention;

FIGURE 3 illustrates a sequence diagram of transmissions in the exemplary wireless communications network of FIGURE 2 according to a first embodiment of the present invention;

FIGURE 4 illustrates additional aspects of incorporating Internet call forwarding into a wireless communications network according to the first embodiment of the present invention;

FIGURE 5A illustrates an exemplary mobile station according to the first embodiment of the present invention;

FIGURE 5B illustrates an alternative IP addressing scheme in operation;

FIGURE 5C illustrates another exemplary mobile station according to the first embodiment of the present invention; and

FIGURE 6 illustrates a method in flowchart form for  
5 implementing Internet call forwarding in a wireless communications network according to the first embodiment of the present invention.

**DETAILED DESCRIPTION OF THE PRESENTLY PREFERRED EXEMPLARY EMBODIMENTS**

10 In the following description, for purposes of explanation and not limitation, specific details are set forth, such as particular circuits, circuit components, techniques, etc. in order to provide a thorough understanding of the invention. However it will be apparent to one of  
15 ordinary skill in the art that the present invention may be practiced in other embodiments that depart from these specific details. In other instances, detailed descriptions of well-known methods, devices, and circuits are omitted so as not to obscure the description of the present invention  
20 with unnecessary detail.

A preferred embodiment of the present invention and its advantages are best understood by referring to FIGURES 1-6 of the drawings, like numerals being used for like and corresponding parts of the various drawings.

5 Referring now to FIGURE 2, an exemplary wireless communications network incorporating Internet forwarding according to the present invention is illustrated. A Visiting Public Land Mobile Network (VPLMN) 100A and a Home Public Land Mobile Network (HPLMN) 100B are shown. Although  
10 the present invention is explained in the context of an inter-PLMN call, it should be understood that the invention is not so limited. With further reference to FIGURE 2, two Public Switched Telephone Networks (PSTN) and the Internet are shown, generally designated herein by the reference  
15 numerals 205 and 210, respectively. The Internet 210 is a packet-switched network operating under the Transmission Control Protocol/Internet Protocol (TCP/IP) and including a multiplicity of routers 215. It should be understood that the Internet 210 may be any general packet-switched network  
20 and the present invention should not be limited to the Internet *per se*.



The Internet 210 is connected to a terminal 220 by a given router 215A. The terminal 220 may be any electronic device in communication with the Internet 210. For example, terminal 220 may be a fax machine, an Integrated Services  
5 Digital Network (ISDN) device, or a general purpose computer. It should be understood that in addition to wireline, the connection from the Internet 210 to the terminal 220 may also be wireless, at least in part. The Internet 210 is in communication with the VPLMN 100A via a connection 245A.  
10 Specifically, connection 245A terminates (or originates depending on the communication) at a Visiting Mobile Services Switching Center (VMSC) 110A.

The VMSC 110A includes a Direct Access Application (DAA) 230 that enables the VMSC 110A to interact with a TCP/IP  
15 network, such as the Internet 210, as is understood in the art. The DAA 230 may include provisions for adhering to the H.323 protocol for signaling. The H.323 protocol is used, for example, for setting up calls (e.g., telephony calls) through a packet network. The VMSC 110A is also able to  
20 receive wireless transmissions via a wireless link 270 directly (or indirectly from a particular BSS area 145 as

shown in FIGURE 1) from a particular Mobile Station (MS) 125 within the VPLMN 100A. It should be understood that the MS 125 may be any type of mobile terminal, as discussed hereinbefore. For example, the MS 125 may be a mobile phone, a pager, a personal digital assistant (PDA), or a computer with a wireless link.

The VMSC 110A further includes an Application-IP, generally designated by the reference numeral 240 in FIGURE 2, for establishing and discontinuing (e.g., general handling) of the Internet forwarding of the present invention in conjunction with the DAA 230. The VMSC 110A is connected directly (although not necessarily so) to a Home Location Register (HLR) 150 within the HPLMN 100B along a connection 255. The VMSC 110A is also connected to a Gateway Mobile Services Switching Center (GMSC) 110B via a first connection 250A, another PSTN 205, and a second connection 250B.

As illustrated in FIGURE 2, the HLR 150 and the GMSC 110B are part of the Home Public Land Mobile Network 100B. The MS 125A, which is a visitor to the VPLMN 100A, is registered in the HLR 150 within the HPLMN 100B. The HLR 150 of or corresponding to the MS 125 includes Internet

Forwarding Functionality (FWD IP) 225, discussed further herein, such that when the FWD IP 225 is activated by the MS 125, the HLR 150 has a record of such activation. The FWD IP 225 includes, for example, an Internet Protocol (IP) address to which incoming information should be forwarded. Other features and corresponding requirements for the FWD IP 225 will be explained in greater detail hereinbelow. The HLR 150 further includes a communications Application 235 that provides communication over a connection 260 to the corresponding communications Application 235 in the GMSC 110B.

The GMSC 110B may acquire the specifics of the features activated in the FWD IP 225 for the MS 125 by using the communications Application 235 and the connection 260 to access the HLR 150. The GMSC 110B may alternatively receive forwarding instructions from the HLR 150 without receiving any details regarding the Internet call forwarding (ICF) features activated by the MS 125. The GMSC 110B also includes a respective Application-IP 240 to facilitate the Internet call forwarding of the present invention in conjunction with another DAA 230. The DAA 230 of the GMSC

110B provides a TCP/IP and/or User Datagram Protocol (UDP)/IP interface for communicating with the Internet 210 via connection 245B. An incoming call, designated generally by the reference numeral 265, is shown entering the wireless communications network at the GMSC 110B.

Referring now to FIGURE 3, a sequence diagram of transmissions in the exemplary wireless communications network of FIGURE 2 is illustrated according to a first preferred embodiment of the present invention. Several parts of the wireless communications network of FIGURE 2 are included in FIGURE 3, i.e., the GMSC 110B, the HLR 150, the VMSC 110A, the MS 125, the PSTN 205, and the Internet 210 are all also shown in the sequence diagram of FIGURE 3. Additionally, incoming call 265 is shown entering the wireless communications network at the GMSC 110B.

Before activation of an Internet call forwarding ability (e.g., an Internet call forwarding (ICF) Supplementary Service (SS) in a GSM network), incoming call 265 is routed from the GMSC 110B through the circuit-switched PSTN 205 (as represented by path arrow 305) via connections 250B and 250A (of FIGURE 2). After activation of an Internet call

forwarding ability, on the other hand, incoming call 265 is instead routed from the GMSC 110B through the packet-switched Internet 210 (as represented by path arrow 310) via connections 245B and 245A (of FIGURE 2). After the  
5 information from the incoming call 265 has reached the VMSC 110A (by either path 305 or 310), the information is preferably transmitted from the VMSC 110A to the MS 125 via the wireless link 270.

It should be understood that the term "information" in  
10 this application refers to fax information, data information, and/or voice information calls, etc. It should also be understood that although the method and system of the present invention will be described in the context of a GSM system, the present invention is not so limited. The Internet call  
15 forwarding may be utilized generally in any wireless communications network by one of ordinary skill after reading and understanding the principles of the present invention.

The subscriber (not pictured) associated with MS 125 may engage the ICF of the present invention (which is preferably  
20 a Supplementary Service (SS) of the wireless communications network) from the MS 125 itself. Alternatively, the

subscriber may be able to contact the relevant wireless services provider over the wireline phone system or by a computer (such as the terminal 220) over the Internet 210 to activate the ICF SS. When the ICF is activated from the MS 125, the Direct Transfer Application (DTAP) facility is preferably employed.

The DTAP facility includes the following four messages pertaining to supplementary services: (1) Register SS, (2) Erase SS, (3) Activate SS, and (4) Deactivate SS. In the DTAP message of FIGURE 3, the MS 125 is activating the ICF SS over the wireless link 270. Many alternative features for the ICF SS of the present invention are contemplated. One preferred embodiment forwards data or fax calls only (but all of the time) through the Internet 210 to the VMSC 110A. The VMSC 110A then transmits the data or fax information to the MS 125 via the wireless link 270. Alternative embodiments will be described more fully hereinbelow.

To fully activate the ICF SS, the VMSC 110A preferably transmits a Mobile Application Part (MAP)-based message to the HLR 150 over the connection 255, as illustrated in FIGURE 2. The MAP message may include an IP address, and if so, an

indication that an IP address populates the address field.  
The HLR 150 may then store in memory the activation of the  
ICF SS in the FWD IP 225. The FWD IP 225 also includes  
relevant specifics regarding the ICF SS feature(s) activated.

5 In this example, such specifics include that fax and data  
calls only (but all of the time) are to be forwarded through  
the Internet 210. It should be understood, however, that fax  
and data (either together or individually) may also be  
selectively forwarded according to the principles of the  
10 present invention.

When the GMSC 110B receives the incoming call 265 (which  
incoming call is affiliated with the MS 125 and/or the  
subscriber corresponding thereto), the GMSC 110B transmits  
a Send Routing Information (SRI) message to the HLR 150 via  
15 connection 260. The HLR 150 transmits a Provide Roaming  
Number (PRN) message to the MSC 110 to which the MS 125 is  
currently associated (VMSC 110A in this example) via  
connection 255. It should be noted that no PRN message (or  
response thereto) need be sent if the forwarding service is  
20 unconditional. The VMSC 110A responds to the inquiry by

transmitting a PRN-Response (PRN-RESP) message via connection 255 to the inquiring HLR 150.

It should be understood that contacting the VMSC 110A in all circumstances is not required; in other words, the HLR 150 may act alone. For example, the HLR 150 may take action by itself when the ICF is unconditional. After the HLR 150 receives the PRN-RESP message from the VMSC 110A, the HLR 150 may then respond to the GMSC 110B by transmitting an SRI-RESP message via connection 260. In a preferred embodiment, only the two responses (the PRN-RESP and SRI-RESP) need be modified to implement the method and system of the present invention. Specifically, in this exemplary embodiment, the response from the HLR 150 adds an indication that the call should be sent over another network (e.g., the Internet) and an address to use (e.g., an IP address).

The GMSC 110B, based on instructions from the HLR 150, forwards the incoming fax or data call (incoming call 265 being fax or data in this example) through the Internet 210 to the VMSC 110A. Because the packet-switched Internet 210 is significantly cheaper than the circuit-switched PSTN 205, the subscriber corresponding to the MS 125 or another



destination such as an H.323 terminal can save communications costs (e.g., the relevant service provider may charge the subscriber less). The subscriber corresponding to the MS 125 may cancel the ICF SS by transmitting a DTAP Deactivate SS  
5 message via the wireless link 270. It should be noted that other messaging/command schemes (other than DTAP/MAP) may be used to implement the present invention.

Referring now to FIGURE 4, additional aspects of incorporating Internet call forwarding into a wireless  
10 communications network according to the first embodiment of the present invention are illustrated. The incoming call 265 is shown arriving at the GMSC 110B via a conventional T1 connection 405. In addition to the DAA 230 and the Application-IP 240, both the GMSC 110B the VMSC 110A further  
15 include a Fax Application 410, an Unrestricted Digital Information (UDI) Application/Modem 415, and a Pulse Code Modulation (PCM) to Real Time Protocol (RTP) (or RTP to PCM) Application 420. Though these elements (and the Application 235) are termed "applications", it should be understood that  
20 they can alternatively be any programming, code, hardware,

software, firmware, etc. that can achieve the described functionality.

The Fax Application 410 is configured so as to be capable of providing the proper interface, e.g., tone  
5 handling, protocol handling, modem handling, etc. The UDI Application/Modem 415 is configured so as to be capable of converting modulated signals to digital signals/packets and vice versa. The RTP to PCM (or PCM to RTP) Application 420 is configured so as to convert from the RTP of the Internet  
10 to the PCM of the telephone network (or vice versa). Each application aids in providing a transition between a standard telecommunications network and the Internet 210.

The GMSC 110B, along with the HLR 150, also includes the Application 235. The Applications 235 enable the GMSC 110B  
15 to acquire details regarding an established ICF SS for the MS 125 from the FWD IP 225. For example, the Internet call forwarding of the present invention alternatively permits information (e.g., fax and data only) to be forwarded to an IP address such as the IP address associated with the  
20 terminal 220. The designated IP address in FWD IP 225 can be transmitted from the HLR 150 via the connection 260 by

virtue of the Applications 235. For example, an SRI-Acknowledge (ACK) message transmitted from the HLR 150 to the GMSC 110B can contain the designated IP address.

Referring now to FIGURE 5A, an exemplary mobile station  
5 125A according to the first embodiment of the present invention is illustrated. The designated IP address is preferably provided by the subscriber associated with the MS 125. (Alternatively, the designated IP address may be provided otherwise, such as by the computer terminal linked  
10 directly to the Internet 210, as noted hereinabove.) The MS 125A includes an Internet call forwarding key (or button) 505 that can begin the establishment procedure or be programmed so as to activate the Internet call forwarding of the present invention at the touch of a single key 505.

15 When the Internet key 505 of the MS 125A begins the establishment procedure, one of the steps may include the inputting of an IP address. An IP address 510 (under current protocols and standards) adheres to the following form: "XXX.XXX.XXX.XXX". Each "X" represents one numerical digit.  
20 It should be noted that the addressing scheme of other packet-switched networks or future IP addressing schemes can

alternatively be used. The IP address 510 input by the subscriber is the designated IP address. The IP address input by the subscriber may alternatively be in a more user-friendly format such as a Uniform Resource Locator (URL), an e-mail address, or another option such as an alias established for this purpose. This alternative is represented by the "ABCXYZ" 512 element on the screen of the MS 125A. The designated IP address represents the designation for information that is to be forwarded over the Internet 210. Such a designated IP address may correspond to a given terminal 220 (e.g., a fax machine, a computer, or an H.323 terminal) or to the MS 125.

Thus, after implementing the method and system of the present invention, the MS 125 may have an IP address as well as a standard telephony address (e.g., an E.164 address, which adheres to the following form: "XXX-XXX-XXXX", in which each "X" represents a single numerical digit). Therefore, the MS 125 can preferably be addressed through both a standard telephony address and an IP address. Furthermore, the MS 125 preferably incorporates IP address handling into the programming and circuitry controlling it.

Even if the MS 125 does not have an IP address associated with it, the MS 125 can still preferably operate with/on IP addresses, e.g., it can supply an IP address in an ICF message. A subscriber associated with MS 125 can preferably enter IP addresses in multiple manners. Actually entering the 12-digit number (with or without manually entering the three "dots") is one example. Alternatively, the subscriber can preferably choose to enter the designated IP address in text form (e.g., a URL). Also, the subscriber preferably has the option to direct incoming information to an e-mail address (which also may be entered in textual form).

Referring now to FIGURE 5B, an alternative IP addressing scheme in operation is illustrated. In this alternative, a subscriber may have activated an ICF SS. In this example, incoming fax and data are to be routed over the less-costly packet-switched network, the Internet 210, from the GMSC 110B to the VMSC 110A, which is serving the MS of the relevant subscriber. The IP address used for this ICF SS is associated with the VMSC 110A. Thus, the incoming fax and data are routed over the Internet 210 to the designated IP address destination of the VMSC 110A. The VMSC 110A may then

distribute the fax and data streams to, for example, the target MS (e.g., MS 125A, 125B, or 125C) via the wireless links of the wireless network. The distribution may be determined by the phone numbers of the target MSs. The

5 Application-IP 240 (or other application or database) contains the requisite programming and information to properly forward the incoming fax and data. The GMSC 110B may receive the IP address of the VMSC 110A from the VMSC 110A or from the MS (e.g., in a separate transaction).

10 Referring now to FIGURE 5C, another exemplary mobile station 125B according to the first embodiment of the present invention is illustrated. MS 125B enables the subscriber to establish an Internet call forwarding option in menu format. An exemplary "Internet Forwarding" menu 515 is

15 illustrated. As explained generally hereinabove, the subscriber may enter a designated IP address. With MS 125B, the subscriber may enter an IP address after selecting the "IP Address" menu entry 530. It should be understood that the "Internet Forwarding" menu 515 may include several (e.g.,

20 hierarchical) layers for each menu entry. For example, the "IP Address" menu entry 530 may, when selected, provide

multiple menu entry options such as entering an e-mail address, URL, numerical IP address, etc. It should be noted that other menu formats are within the spirit and scope of the present invention.

5           Some of the other available options for the subscriber are: "Data or Fax" menu entry 520 and "Long Distance" menu entry 525. An unspecified ("...") menu entry 535 is also illustrated to reinforce that the exemplary menu entries are not exhaustive. The "Data or Fax" menu entry 520 preferably  
10 enables the subscriber to specify that only data or fax types of information (e.g., not voice calls) are to be forwarded through the Internet 210. As another alternative, the subscriber (through menu entry 520 or otherwise), may specify that all fax and data calls are to be forwarded over the  
15 Internet 210 to an Internet destination such as terminal 220. The "Long Distance" menu entry 525 may enable the subscriber to specify that only calls that are long distance (e.g., that would otherwise incur toll charges) are to be forwarded over/through the Internet 210. As one possible additional  
20 alternative, another menu option can enable the subscriber to activate ICF for fax and data calls that are also long

distance. It should be noted that those of ordinary skill will be able to devise other strategies, techniques, and interfaces for permitting a subscriber to activate Internet call forwarding after reading and understanding the principles of the present invention.

Another possible ICF feature is that the criterion for utilizing the Internet 210 can be based on whether the incoming call 265 is international. If the incoming call 265 is international, then it can be routed through the Internet 210 to avoid international charges. This can be achieved, for example, by comparing the country codes of the called and calling parties.

The MS 125 can include a myriad of abilities, indicators, and options to further refine the ICF SS. For example, the MS 125 may include an indication that the subscriber has information waiting at a designated IP address destination. An indication can be included that denotes that calls are being forwarded over/through the Internet 210, along with indications connoting which ICF features are activated. Furthermore, the MS 125 can also include programming and/or circuitry that conducts a format check



when an IP address (numerical or textual or an e-mail address) is entered. The MS 125, in conjunction with the associated VMSC 110A, can verify that an entered IP address exists on the Internet 210. Consequently, the MS 125 can  
5 include an illegal IP address indicator for either or both situations.

Referring now to FIGURE 6, a method in flowchart form for implementing Internet call forwarding in a wireless communications network according to the first embodiment of  
10 the present invention is illustrated. Flowchart 600 begins with the MS 125 transmitting a message activating Internet call forwarding (ICF) (step 605). This ICF message includes specifics regarding any special features that the subscriber is activating. These specifics may include a designated IP  
15 address (e.g., such as IP address 510) and a toll-calling-only request. As an alternative embodiment, the VMSC 110A can verify, when a visiting MS 125 requests to activate an ICF SS, that the VMSC 110A has either a direct Internet 210 connection or a T1 line (in which the T1 line is a PSTN  
20 connection, and preferably local) to an MSC 110 that does have a direct Internet 210 connection. If neither option is

available, then the VMSC 110A can so notify the MS 125 or  
merely refuse to permit call routing through the Internet 210  
and thence to the VMSC 110A (i.e., call routing over the  
Internet 210 to an Internet destination such as the terminal  
5 220 is still desirable and permitted).

Continuing with the description of flowchart 600, the  
HLR 150 corresponding to the MS 125 receives the ICF message  
(step 610). The ICF message may have been transmitted over  
a Signaling System No. 7 (SS7) network, the Internet (in  
10 accordance with another embodiment described hereinbelow),  
etc. The HLR 150 processes the ICF message by storing the  
particular ICF features requested by the MS 125 as part of  
the FWD IP 225.

Once an incoming call 265 is detected by the GMSC 110B  
15 (step 620), the HLR 150 is interrogated to determine whether  
the ICF SS is activated (step 625). Additionally, a  
determination is made regarding which, if any, special ICF  
SS features are activated (also step 625). These  
determinations (of step 625) are effected by analyzing the  
20 FWD IP 225 profile for the called party, which is MS 125 in  
this example. A branching determination is made (e.g., by

the HLR 150 or by the GMSC 110B after the HLR 150 has provided the FWD IP 225 profile) to determine whether the incoming call 265 fits the profiled features (and that the ICF SS is activated) (step 630).

5           The results are transmitted by Applications 235 over connection 260 to the GMSC 110B. Either the profile or the final result (of step 630) or some intermediate product thereof is transmitted to GMSC 110B from the HLR 150; in other words, either the GMSC 110B or the HLR 150 may be  
10       responsible for the determinations (of steps 625 and 630). Regardless, any such locus for the determinations is embraced by the present invention.

          For this example, the subscriber associated with the MS 125 has activated ICF, but only for fax/data calls. If the  
15       information in the incoming call 265 is a voice call, then the (voice call) information is transmitted over the PSTN 205 (e.g., a circuit connection is setup over the PSTN 205 from the GMSC 110B to the VMSC 110A) (step 635). If, on the other hand, the information in the incoming call 265 is fax or  
20       data, then the (fax or data) information is transmitted over/through the Internet 210 (step 640).

In a modification of the immediately preceding example, if the MS 125 has additionally established (as an optional feature) a designated IP address destination for such calls, then the fax/data information will be transmitted from the  
5 GMSC 110B to the Internet 210 via the connection 245B and then over the Internet 210 to an IP address destination such as terminal 220. If the MS 125 has not established a designated IP address destination (or the designated IP address destination corresponds to the MS 125), then the  
10 fax/data information will be transmitted through the Internet 210 and onward to the VMSC 110A via the connection 245A. The DAA 230, in conjunction with the Application-IP 240, will then reformat the TCP/IP and/or UDP/IP and/or RTP packets into another format, depending on the air interface  
15 specification for the wireless communications network, which is GSM in these examples.

In another example, the subscriber has two phone numbers (one for fax calls) and has activated the ICF SS for fax calls. When the HLR 150 is performing the determinations (of  
20 steps 625-630), the HLR 150 will be able to determine that the incoming call 265 is a fax call when the B-number is to

the fax phone number of the subscriber. Assuming that the incoming call 265 is to the fax number in this example, then the HLR 150 will pass the designated IP address to the GMSC 110B via the connection 260. Alternatively, if the subscriber only has one E.164 number, the Bearer Capabilities of the ISDN Signaling User Part (ISUP) message of the incoming call 265 may indicate that the incoming call 265 is a fax call.

In another embodiment of the Internet forwarding of the present invention, and with reference again to FIGURE 2, ISUP messaging may be transmitted over the Internet 210 instead of an SS7 data network (such as represented in this example by connections 250A, 250B, and 255). For example, an Initial Address Message (IAM) may be transmitted over the Internet 210 when performing a call setup procedure for a circuit switched call through a PSTN 205. This can reduce the costs of operating a telecommunication network inasmuch as it is (or becomes) cheaper (e.g., per byte of information) to transmit information over the Internet 210 as compared to an SS7 network. Furthermore, the information transmitted in the sequence diagram of FIGURE 2 (other than the DTAP message)

may also be transmitted over the Internet 210. The Application-IP 240 of both the GMSC 110B and the VMSC 110A may receive the IAM that is transmitted over the Internet 240 and then setup a channel from the GMSC 110B to the MS 125.

5           Although preferred embodiments of the method and system of the present invention have been illustrated in the accompanying Drawings and described in the foregoing Detailed Description, it will be understood that the present invention is not limited to the embodiments disclosed, but is capable  
10 of numerous rearrangements, modifications and substitutions without departing from the spirit of the invention as set forth and defined by the following claims.

**WHAT IS CLAIMED IS:**

1           1.    In a telecommunications system, a method for  
2   selectively forwarding an incoming message to a subscriber  
3   over a packet-switched network, said method comprising the  
4   steps of:

5                receiving said incoming message, said incoming  
6   message to said subscriber containing therein a data type  
7   parameter;

8                determining, within a home location register for  
9   said subscriber, a call forwarding parameter associated  
10   within said subscriber corresponding to said data type  
11   parameter; and

12               routing said incoming message, pursuant to said  
13   call forwarding parameter, over said packet-switched network  
14   to said subscriber.

1           2.    The method according to claim 1, further comprising  
2   the steps of:

3                transmitting, by said subscriber, a call forwarding  
4   activation request to said home location register; and

5           storing, pursuant to said call forwarding  
6   activation request, said forwarding parameter within said  
7   home location register.

1           3.   The method according to claim 1, wherein said  
2   packet-switched network is the Internet.

1           4.   The method according to claim 1, wherein said step  
2   of routing further comprises the step of routing said  
3   incoming message over said packet-switched network to an  
4   address destination on said packet-switched network.

1           5.   The method according to claim 1, wherein said step  
2   of routing further comprises the step of routing said  
3   incoming message through said packet-switched network and  
4   then back to said telecommunications system.

1           6.   The method according to claim 1, wherein said call  
2   forwarding parameter derived from said incoming message  
3   comprises an indication that said call forwarding is  
4   activated for data and fax information.



1           7.    The method according to claim 1, wherein said call  
2   forwarding parameter derived from said incoming message  
3   comprises an indication that said call forwarding is  
4   activated for incoming calls that incur toll charges.

1           8.    The method according to claim 1, wherein said  
2   incoming message includes a designated packet-switched  
3   network address destination.

1           9.    A telecommunications system for selectively  
2   forwarding an incoming message to a subscriber over a packet-  
3   switched network, said system comprising:

4                a home location register to which said subscriber  
5   is assigned;

6                a home database, attached to said home location  
7   register, for storing therein a call forwarding profile for  
8   said subscriber, said call forwarding profile containing  
9   therein at least one call forwarding parameter associated  
10   with said subscriber, each said call forwarding parameter

11 corresponding to a data type parameter contained in said  
12 incoming message; and  
13 routing means for routing said incoming message,  
14 pursuant to said call forwarding parameter, over said packet-  
15 switched network to said subscriber.

1 10. The telecommunications system according to claim  
2 9, further comprising:

3 a mobile terminal for transmitting by said  
4 subscriber a call forwarding activation request to said home  
5 location register, said call forwarding activation request  
6 updating said call forwarding profile of said subscriber  
7 within said home database.

1 11. The telecommunications system according to claim  
2 10, wherein said packet-switched network is the Internet.

1 12. The telecommunications system according to claim  
2 11, wherein said call forwarding activation request includes  
3 an Internet protocol address destination.

1           13. The telecommunications system according to claim  
2       12, wherein said Internet protocol address destination is  
3       associated with a terminal connected to said Internet.

1           14. The telecommunications system according to claim  
2       12, wherein said Internet protocol address destination is  
3       associated with said mobile terminal.

1           15. The telecommunications system according to claim  
2       10, wherein said call forwarding activation request includes  
3       a provision to forward via said packet-switched network  
4       incoming calls comprised of fax and data information.

1           16. The telecommunications system according to claim  
2       10, wherein said call forwarding activation request includes  
3       a provision to forward via said packet-switched network  
4       incoming calls which incur toll charges.

1           17. The telecommunications system according to claim  
2       10, wherein said subscriber inputs a designated Internet  
3       protocol address destination to said mobile terminal.

1           18. The telecommunications system according to claim  
2   17, wherein said mobile terminal checks said designated  
3   Internet protocol address destination.

1           19. The telecommunications system according to claim  
2   17, wherein said mobile terminal, in conjunction with a  
3   mobile switching center, verifies the existence of said  
4   designated Internet protocol address destination.

1           20. The telecommunications system according to claim  
2   10, wherein said call forwarding activation request is  
3   transmitted to said home database via said packet-switched  
4   network.

1           21. A mobile terminal, associated with a subscriber,  
2   for selectively indicating the forwarding of an incoming  
3   message thereto over a packet-switched network, said mobile  
4   terminal comprising:

5           input means for inputting, by said subscriber, a  
6   call forwarding activation request; and

7 transmission means for transmitting said call  
8 forwarding activation request, whereby said incoming message  
9 is forwarded to said subscriber, pursuant to said call  
10 forwarding activation request, over said packet-switched  
11 network.

1 22. The mobile terminal according to claim 21, wherein  
2 said input means further comprises a key means for inputting  
3 said call forwarding activation request by pressing a single  
4 key.

1 23. The mobile terminal according to claim 21, wherein  
2 said input means further comprises a menu means for inputting  
3 said call forwarding activation request.

1 24. The mobile terminal according to claim 21, wherein  
2 said packet-switched network is the Internet and said call  
3 forwarding activation request comprises an Internet protocol  
4 address.

1           25. The mobile terminal of Claim 24, wherein said input  
2 means further comprises format checking means for checking  
3 whether a respective inputted Internet protocol address is  
4 in a proper format.

1           26. The mobile terminal of Claim 23, wherein said call  
2 forwarding activation request is selected from the group  
3 consisting of (i) fax and data only Internet call forwarding,  
4 (ii) long distance only Internet call forwarding, (iii) e-  
5 mail Internet protocol address call forwarding, and (iv)  
6 combinations of (i), (ii) and (iii).

7           27. The mobile terminal of Claim 21, further comprising  
8 Internet call forwarding indicator means for providing an  
9 indication to a subscriber that Internet call forwarding is  
10 activated.

**ABSTRACT OF THE DISCLOSURE**

A method, system and apparatus in a wireless communications system selectively utilizes the Internet for the transmission of information. In a first embodiment, a  
15 subscriber can activate an Internet call forwarding (ICF) supplementary service (SS). From the subscriber's Mobile Station, an ICF message is transmitted to and stored in the subscriber's Home Location Register (HLR). The ICF message may optionally designate an Internet protocol (IP) address  
20 destination and may optionally activate other features pursuant to the data type received. For example, the ICF message may request that only fax/data calls or only calls that would otherwise incur a long distance charge be forwarded over/through the Internet. In operation, an  
25 incoming call to a Gateway Mobile Services Switching Center (GMSC) causes the GMSC to interrogate the called party's HLR. The information in the incoming call is then forwarded either over/through the Internet or over the PSTN based on the features activated by the ICF message. In another  
30 embodiment, conventional telecommunication signaling commands such as the Initial Address Message may be transmitted to the target telecommunications node over the Internet.

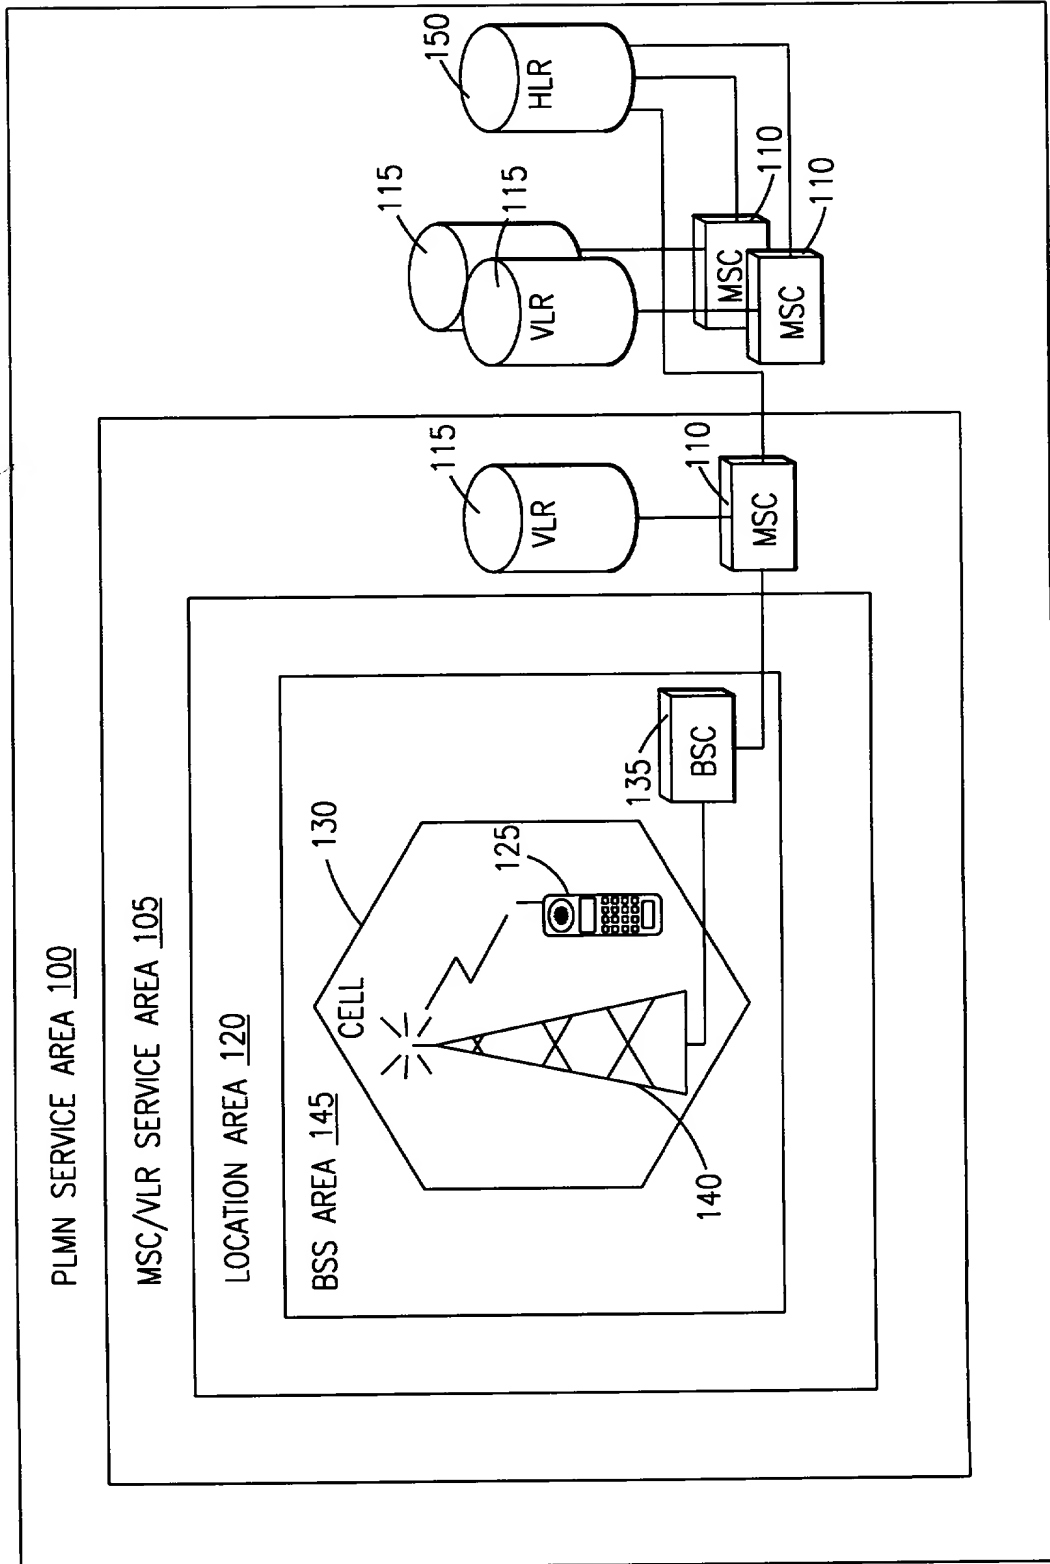


FIG. 1



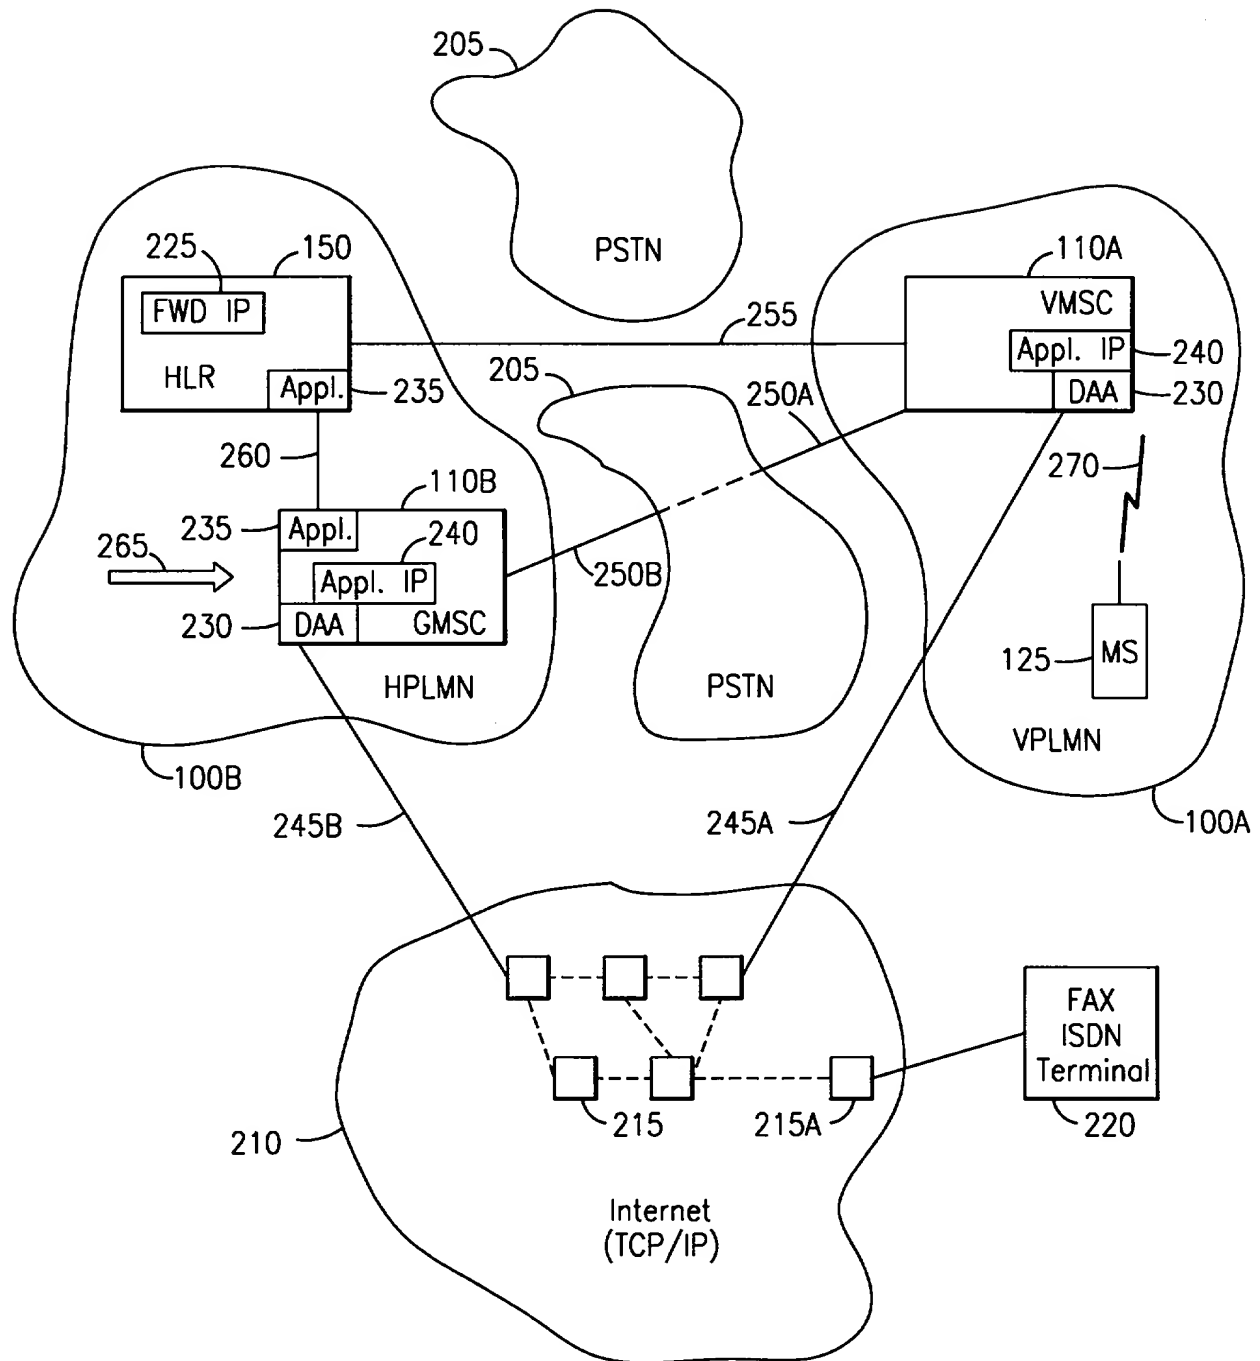
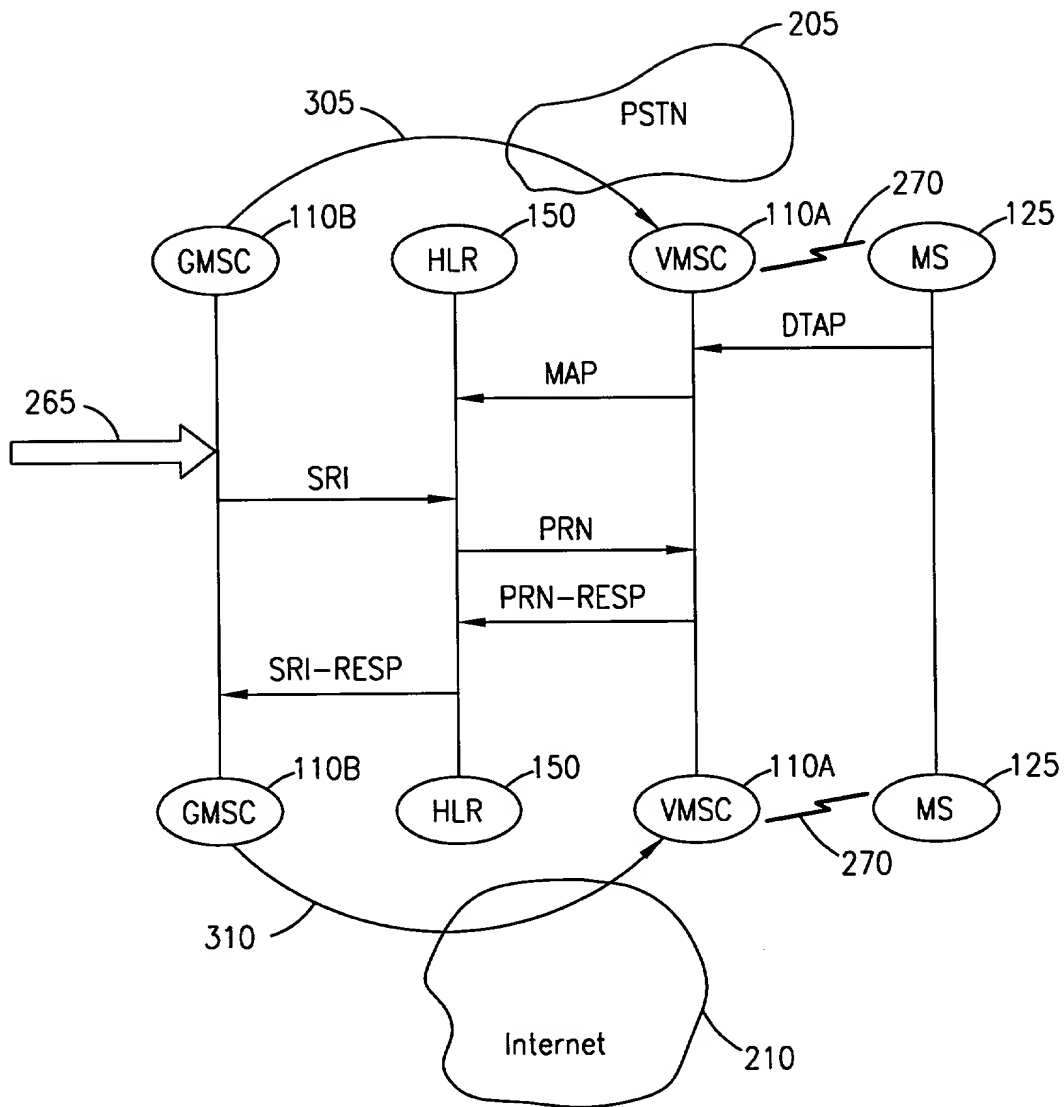


FIG. 2

**FIG. 3**

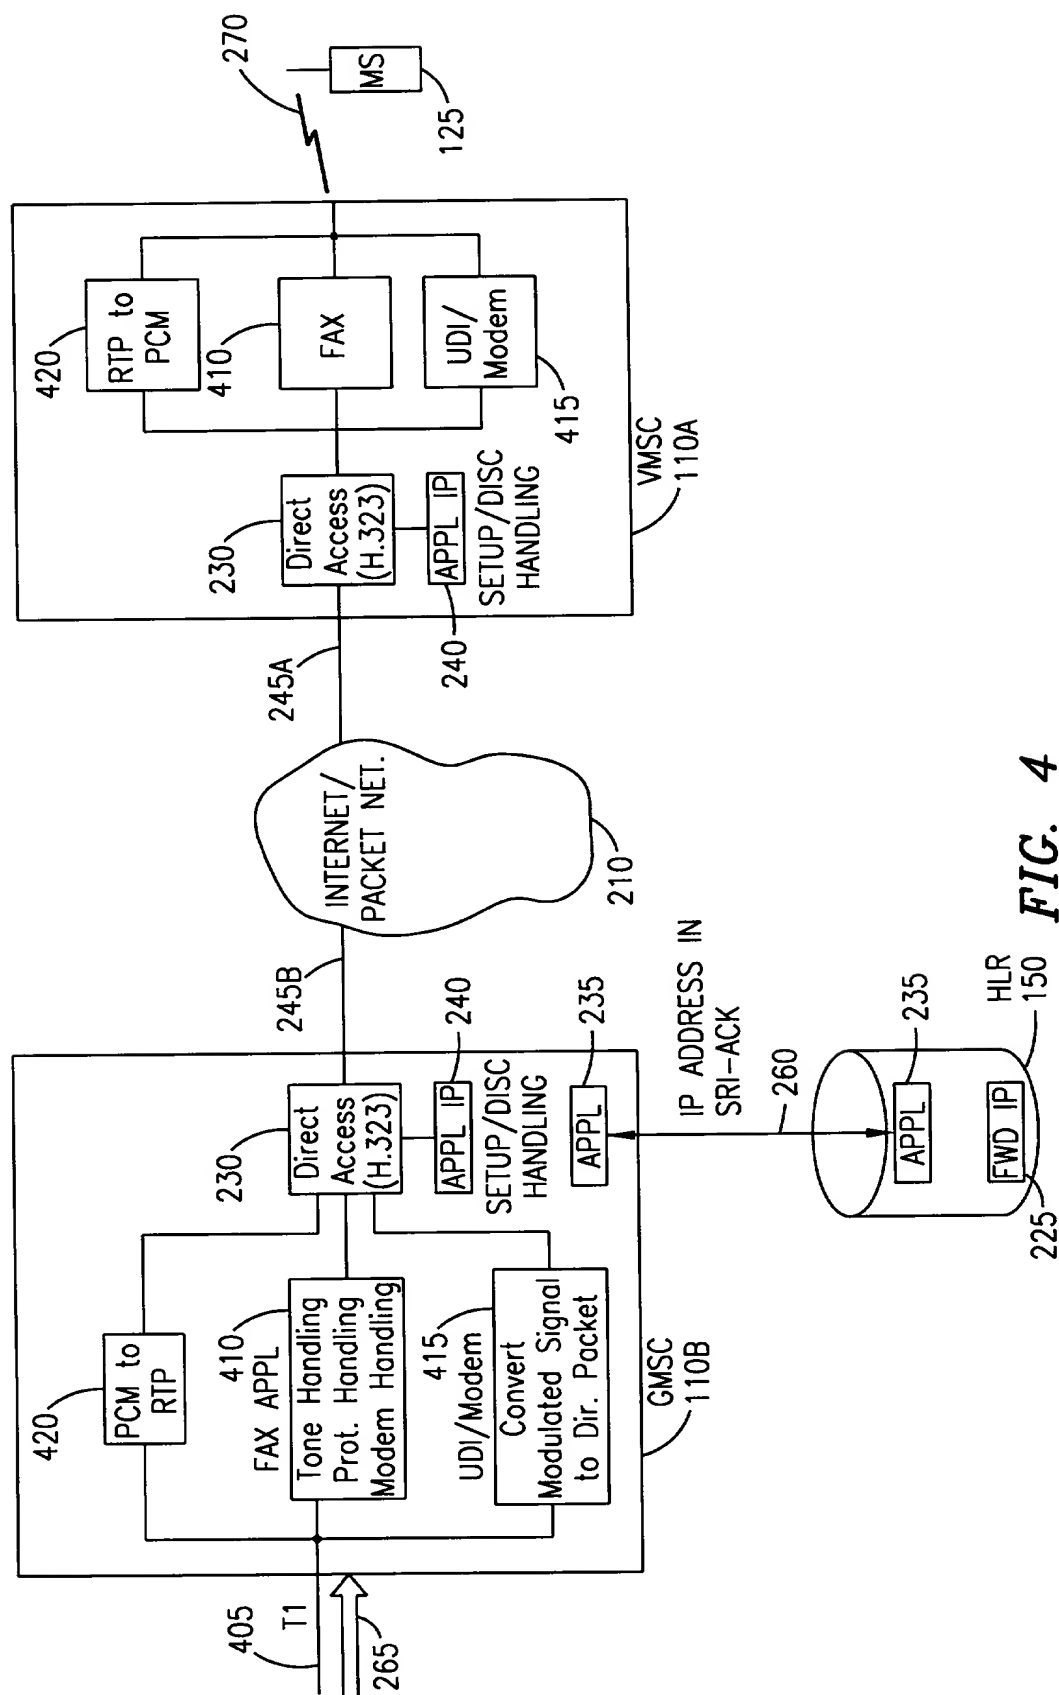
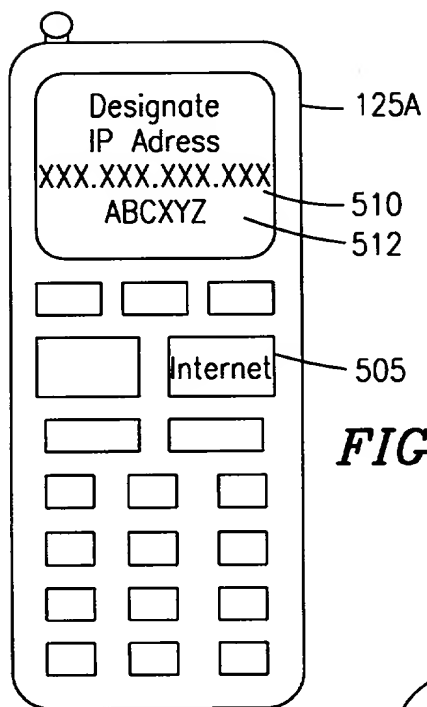
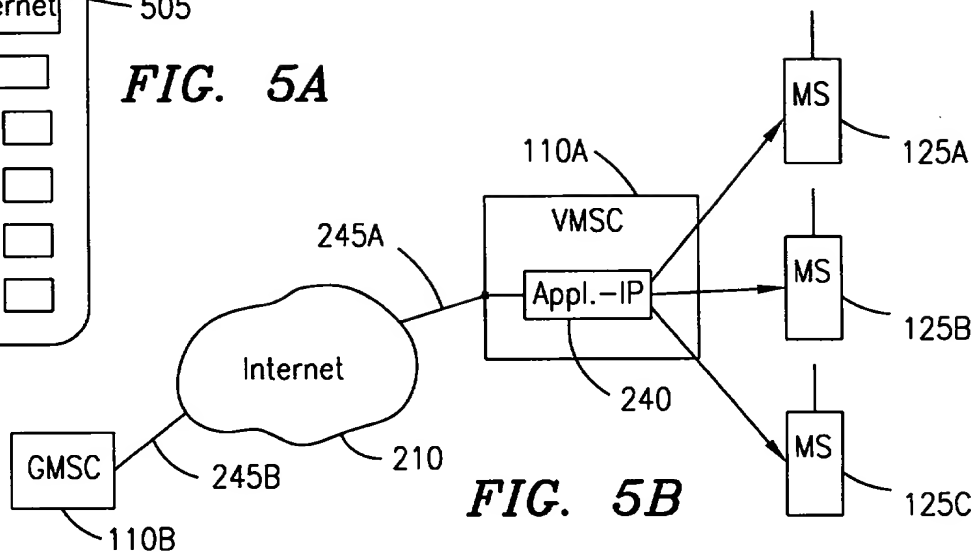
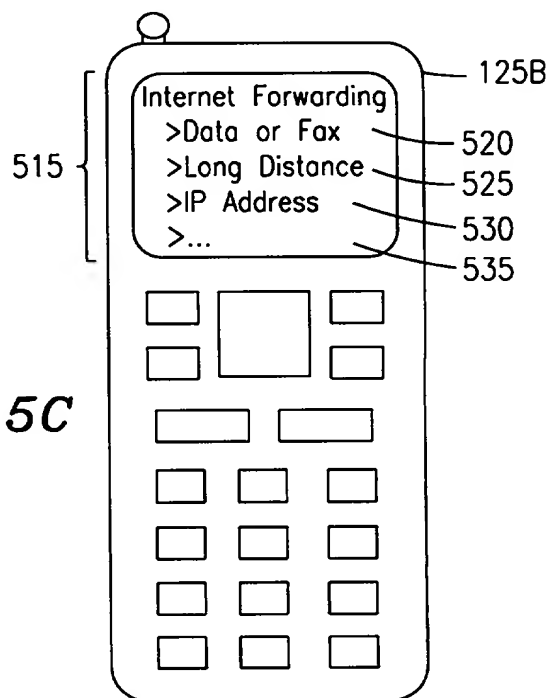
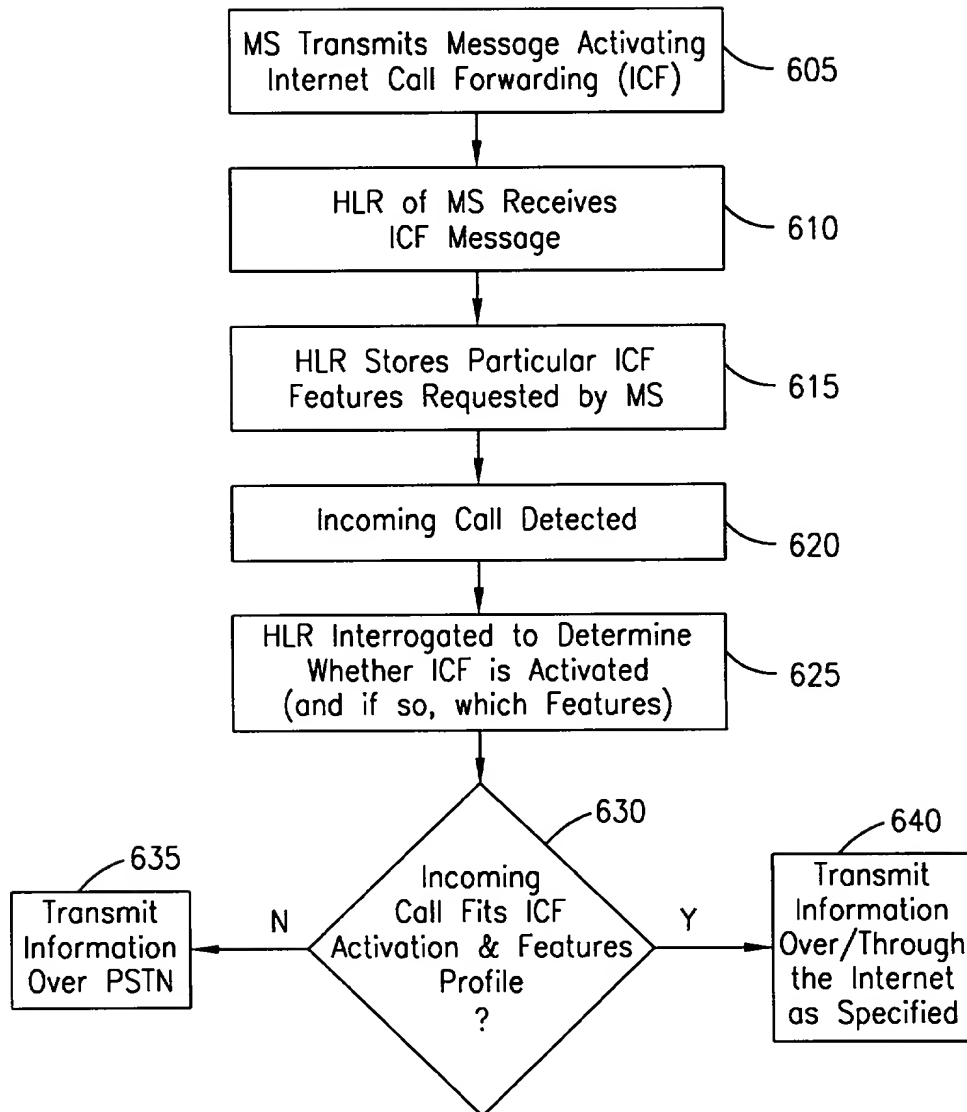


FIG. 4

**FIG. 5A****FIG. 5B****FIG. 5C**

600

**FIG. 6**

## COMBINED DECLARATION AND POWER OF ATTORNEY

As a below named inventor, I hereby declare that:

My residence, post office address and citizenship are as stated below next to my name; and

I verily believe that I am the original, first and sole inventor (if only one name is listed below) or an original, first and joint inventor (if plural names are listed below) of the subject matter which is claimed and for which a patent is sought on the invention entitled: **A METHOD, SYSTEM AND APPARATUS IN A TELECOMMUNICATIONS NETWORK FOR SELECTIVELY TRANSMITTING INFORMATION UTILIZING THE INTERNET**, the specification of which:

X is attached hereto.

\_\_\_\_\_ was filed on \_\_\_\_\_, under Attorney Docket No. \_\_\_\_\_ and assigned Application Serial No. \_\_\_\_\_ and was amended on \_\_\_\_\_ (if applicable).

I hereby state that I have reviewed and understand the contents of the above identified specification, including the claims, as amended by any amendment referred to above.

I acknowledge the duty to disclose to the Office all information known to me to be material to the patentability of this application as defined in 37 CFR § 1.56.

I hereby claim foreign priority benefits under 35 U.S.C. § 119 of any foreign application(s) for patent or inventor's certificate listed below and have also identified below any foreign application for patent or inventor's certificate having a filing date before that of any application on which priority is claimed:

Country	Number	Date Filed	Priority Claimed
_____	_____	_____	_____
_____	_____	_____	_____
_____	_____	_____	_____

I hereby claim the benefit under 35 U.S.C. § 120 of any United States application(s) listed below and, insofar as the subject matter of each of the claims of this application is not disclosed in the prior United States application in the manner provided by the first paragraph of 35 U.S.C. § 112, I acknowledge the duty to disclose to the Office all information known to me to be material to patentability of the application as defined in 37 CFR § 1.56 which occurred between the filing date of the prior application and the national or PCT international filing date of this application:

Application Serial No.	Filing Date	Status (patented, pending)
_____	_____	_____
_____	_____	_____
_____	_____	_____
_____	_____	_____


I hereby appoint the following attorneys and/or agents to prosecute this application and to transact all business in the Patent and Trademark Office connected therewith: Donald D. Mondul, Reg. No. 29,957; Charles L. Moore, Jr., Reg. No. 33,742; David G. Matthews, Reg. No. 33,959; David C. Hall, Reg. No. 38,904; David K. Purks, Reg. No. 40,133; Debra K. Stephens, Reg. No. 38,211 and James S. Finn, Reg. No. 38,450 of **ERICSSON INC.**, 1 Triangle Drive, Research Triangle Park, N.C. 27709, and THOMAS E. ANDERSON, Reg. No. 37,063; ANDERS M. ARISMENDI, JR., Reg. 31,715; JEFFERY E. BACON, Reg. No. 35,055; THOMAS L. CANTRELL, Reg. No. 20,849; THOMAS L. CRISMAN, Reg. No. 24,846; SHREEN K. DANAMRAJ, Reg. P-41,696; STUART D. DWORK, Reg. No. 31,103; H. MATHEWS GARLAND, Reg. No. 19,129; J. KEVIN GRAY, Reg. No. 37,141; STEVEN R. GREENFIELD, Reg. No. 38,166; KEVIN R. HANSBRO, Reg. No. 38,485; J. PAT HEPTIG, Reg. No. 40,643; CRAIG A. HOERSTEN, Reg. No. 38,917; JOHN R. KIRK, JR., Reg. No. 24,477; W. DAVID LEE, Reg. No. 39,743; PETER J. MANSO, Reg. No. 32,264; ROGER L. MAXWELL, Reg. No. 31,855; ROBERT A. McFALL, Reg. No. 28,968; LISA H. MEYERHOFF, Reg. No. 36,869; MICHELE MOBLEY, Reg. No. 35,616; STANLEY R. MOORE, Reg. No. 26,958; RICHARD J. MOURA, Reg. No. 34,883; MARK V. MULLER, Reg. No. 37,509; P. WESTON MUSSELMAN, JR., Reg. No. 31,644; RICHARD L. MYSLIWIEC, Reg. No. 40,098; RUSSELL N. RIPPAMONTI, Reg. No. 39,521; HOLLY I. RUDNICK, Reg. P-43,065; KEITH W. SAUNDERS, Reg. No. 41,462; ROBERT L. SCOTT, JR., Reg. No. P-43,102; JERRY R. SELINGER, Reg. No. 26,582; ALFRED A. STADNICKI, Reg. 30,226; SCOTT B. STAHL, Reg. No. 33,795; RICHARD J. STOKEY, Reg. 40,383; ANDRE M. SZUWALSKI, Reg. No. 35,701; ALAN R. THIELE, Reg. 30,694; WILLIAM J. TUCKER, Reg. 41,356; CHARLES PATRICK TURLEY, Reg. No. 35,723; TAMSEN VALOIR, Reg. 41,417; RAYMOND VAN DYKE, Reg. No. 34,746; BRIAN D. WALKER,

Reg. No. 37,751, GERALD T. WELCH, Reg. No. 30,332; STEPHEN J. WYSE, Reg. 40,880 and JESSICA W. YOUNG, Reg. 39,884 and of the firm of **JENKENS & GILCHRIST**, 3200 Fountain Place, 1445 Ross Avenue, Dallas, Texas 75202-2799; and


Address all telephone calls and correspondence to:

Raymond Van Dyke  
Jenkins & Gilchrist, P.C.  
3200 Fountain Place  
1445 Ross Avenue  
Dallas, Texas 75202-2799  
214/855-4708

I hereby declare that all statements made herein of my own knowledge are true and that all statements made on information and belief are believed to be true; and further that these statements were made with the knowledge that willful false statements and the like so made are punishable by fine or imprisonment, or both, under Section 1001 of Title 18 of the United States Code, and that such willful false statements may jeopardize the validity of the application or any patent issued thereon.

1	Vladimir Alperovich		7-17-98
	<b>First Name</b>		<b>Inventor's Signature</b>
	18419 Rain Dance Trail Dallas, Texas 75252	USA	
	<b>Residence</b>	<b>Citizenship</b>	
	18419 Rain Dance Trail Dallas, Texas 75252		
	<b>Post Office Address</b>		



2	Eric Valentine		7/17/98
	<b>First Name</b>	<b>Inventor's Signature</b>	<b>Date</b>
	1600 Brazos Trail Plano, Texas 75075		USA
	<b>Residence</b>	<b>Citizenship</b>	
	1600 Brazos Trail Plano, Texas 75075		
	<b>Post Office Address</b>		